

**PRODUCT SPECIFICATIONS**

|   |   |
|---|---|
| <p><b>Accuracy</b></p> <ul style="list-style-type: none"> <li>Standard Mode <math>\pm 0.1^{\circ}\text{C}</math> (<math>\pm 0.2^{\circ}\text{F}</math>)</li> <li>Direct Mode <math>\pm 0.1^{\circ}\text{C}</math> (<math>\pm 0.2^{\circ}\text{F}</math>)</li> <li>Fast Mode* <math>\pm 0.3^{\circ}\text{C}</math> (<math>\pm 0.6^{\circ}\text{F}</math>)</li> </ul> | <p><b>Measurement Response Time</b></p> <ul style="list-style-type: none"> <li>Standard Mode:                     <ul style="list-style-type: none"> <li>&lt;10 sec Oral</li> <li>&lt;15 sec Axillary/Rectal</li> </ul> </li> <li>Direct Mode:                     <ul style="list-style-type: none"> <li>&lt;60 sec Oral, Axillary, Rectal</li> </ul> </li> <li>Fast Mode:*                     <ul style="list-style-type: none"> <li>&lt;4 sec Oral</li> <li>&lt;15 sec Axillary/Rectal</li> </ul> </li> <li>Cold Mode:*                     <ul style="list-style-type: none"> <li>&lt;15 sec Oral</li> <li>&lt;20 sec Axillary/Rectal</li> </ul> </li> </ul> |
| <p><b>Temperature Measurement Range</b></p> <ul style="list-style-type: none"> <li>30.0°C–43.0°C (86.0°F–109°F)</li> </ul>  | <p><b>Battery Life</b></p> <ul style="list-style-type: none"> <li>6000 measurements on 4 'AA' Alkaline 1.5V batteries</li> </ul>  |
| <p><b>Ambient Operating Temperature Range</b></p> <ul style="list-style-type: none"> <li>10°C–40°C (50°F–104°F) at 10% - 95% RH (non-condensing)</li> </ul>   | <p><b>Anti-Theft System*</b></p> <ul style="list-style-type: none"> <li>Electronic system (return to base message)</li> <li>Mountable base with key lock</li> <li>Mobile rolling stand base with key lock</li> </ul>  |
| <p><b>Storage Temperature Range</b></p> <ul style="list-style-type: none"> <li>-25°C–55°C (-13°F–131°F) at 95% RH (non-condensing)</li> </ul>   | <p><b>Weight and Dimensions</b></p> <ul style="list-style-type: none"> <li>385 grams (13.5 ounces)</li> <li>84mm W x 152 mm H x 56 mm D (3.2in W x 6.0in H x 2.1in D)</li> </ul>  |
| <p><b>Primary Operating Modes</b></p> <ul style="list-style-type: none"> <li>Standard</li> <li>Direct</li> <li>Fast*</li> <li>Cold*</li> </ul>  | <p><b>Standards</b></p> <ul style="list-style-type: none"> <li>UL60601-1 Compliant</li> <li>CAN/CSA C22.2No601.1 Compliant</li> <li>EN 12470-3 (In standard predictive mode)</li> <li>ASTM 1112 (In standard predictive mode)</li> </ul>  |

\* available in ADA model only

**ORDERING DETAILS**

**Complete Units**

| Code              | Description                | Ship Case   |
|-------------------|----------------------------|-------------|
| 504003 FILAC 3000 | EZA Oral/Axillary Complete | 1 Each/Case |
| 504008 FILAC 3000 | EZA Rectal Complete        | 1 Each/Case |
| 505003 FILAC 3000 | ADA Oral/Axillary Complete | 1 Each/Case |
| 505008 FILAC 3000 | ADA Rectal Complete        | 1 Each/Case |

**Probes and Chambers**

| Code              | Description              | Ship Case   |
|-------------------|--------------------------|-------------|
| 500026 FILAC 3000 | Oral Probe-4ft           | 1 Each/Case |
| 500028 FILAC 3000 | Oral Isolation Chamber   | 1 Each/Case |
| 500036 FILAC 3000 | Rectal Probe-4ft         | 1 Each/Case |
| 500038 FILAC 3000 | Rectal Isolation Chamber | 1 Each/Case |

**Probe Covers**

| Code              | Description  | Ship Case       |
|-------------------|--------------|-----------------|
| 502000 FILAC 3000 | Probe Covers | 2,000 Each/Case |
| 500500 FILAC 3000 | Probe Covers | 500 Each/Case   |

**Accessories**

| Code              | Description                     | Ship Case   |
|-------------------|---------------------------------|-------------|
| 500046 FILAC 3000 | Wall Mounting Base with Lock    | 1 Each/Case |
| 500047 FILAC 3000 | Mounting Base for Rolling Stand | 1 Each/Case |
| 500048 FILAC 3000 | Mounting Base with Pole Clamp   | 1 Each/Case |
| 500099 FILAC 3000 | Calibration Plug                | 1 Each/Case |
| 303059            | Rolling Stand                   | 1 Each/Case |
| 8884813711        | Rolling Stand Basket            | 1 Each/Case |

FOR MORE INFORMATION AND SUPPORT, PLEASE CONTACT YOUR LOCAL COVIDIEN REPRESENTATIVE OR VISIT [www.filactraining.com](http://www.filactraining.com)

COVIDIEN, COVIDIEN with logo, Covidien logo and positive results for life are U.S. and internationally registered trademarks of Covidien AG.

Other brands are trademarks of a Covidien company. ©2011 Covidien.

MS\_2011\_S5\_0269



COVIDIEN (UK) COMMERCIAL LTD. 4500 PARKWAY WHITELY, FAREHAM HAMPSHIRE, PO15 7NY UNITED KINGDOM

+44(0)203 027 1757 (T)  
+44(0)203 027 1758 (F)  
UKSALES@COVIDIEN.COM

WWW.COVIDIEN.COM

Professional people need professional tools



**FILAC™ 3000 Electronic Predictive Thermometers**  
Exclusively for healthcare professionals



**FILAC™ 3000 EZA and FILAC™ 3000 ADA:**  
The electronic predictive thermometers that use advanced technology to provide fast and accurate readings in multiple, easy-to-use formats.


## Reliable results at your finger tips

FILAC™ 3000 Electronic Predictive Thermometers are 'ready to go' out of the box, for a fast and accurate option that meets your specific clinical needs.

FILAC™ 3000 Thermometers provide accurate readings for temperatures taken at a range of measurement sites – oral, axillary or rectal – using separate colour-coded isolation chambers\* and separate covers for site-specific use.

\* blue chamber for oral and axillary measurements, red chamber for rectal measurements

## Standard and advanced models

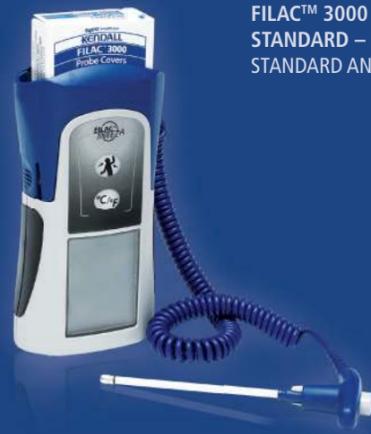

FILAC™ 3000 EZA STANDARD – EASY TO USE IN STANDARD AND DIRECT MODE



FILAC™ 3000 ADA ADVANCED – STANDARD AND DIRECT MODES OFFERING ADVANCED FEATURES AND BENEFITS

| FEATURES   | FILAC™ 3000 EZA Standard model | FILAC™ 3000 ADA Advanced model |
|--|--------------------------------|--------------------------------|
| <b>MODES</b>   |                                |                                |
| • Standard   | ✓                              | ✓                              |
| • Direct   | ✓                              | ✓                              |
| • Advanced   |                                |                                |
| - Fast   | X                              | ✓                              |
| - Cold   | X                              | ✓                              |
| - Biotech  | X                              | ✓                              |
| • Pulse timer  | X                              | ✓                              |
| <b>MEASUREMENTS</b>  |                                |                                |
| • Oral   | ✓                              | ✓                              |
| • Axillary   | ✓                              | ✓                              |
| • Rectal   | ✓                              | ✓                              |
| Separate isolation chambers for oral/axillary (blue) and rectal (red) measurements | ✓                              | ✓                              |
| Anti-theft wall mount and mechanics  | X                              | ✓                              |

## FILAC™ 3000 EZA and FILAC™ 3000 ADA Electronic Predictive Thermometers

### ACCURATE AND FAST

Thermometers in the FILAC™ 3000 family use advanced technology to provide accuracy and speed in multiple formats, with accurate readings in under 4 seconds or advanced accuracy readings in under 10 seconds. Our patented design, controlled calibration methods and stringent manufacturing processes contribute to our outstanding accuracy and reliability.

| MODE*         | ACCURACY | SPEED        |
|---------------|----------|--------------|
| Standard Mode | +/-0.1°C | 6-10 seconds |
| Direct Mode   | +/-0.1°C | <60 seconds  |
| Fast Mode†    | +/-0.3°C | 3-4 seconds  |

\* in predictive mode (fast or standard), devices take a series of measurements and calculate a reading; in direct mode, devices take continuous readings  
† available in ADA model only

### EASY TO USE

The FILAC™ 3000 Thermometer has a compact, robust design that stands upright on a flat surface, easy-to-hold rubber side grips and an intuitive interface system with a unique progress bar for temperature measurement status. The ADA model includes advanced operating features and a pulse timer capability.

### INFECTION CONTROL

The FILAC™ 3000 Thermometer's isolation chamber design, colour-coded probe and single-use probe covers minimize the risk of cross contamination, enhancing infection control measures. Our probe covers also act as a medium for patient-to-thermometer heat transfer, contributing to system accuracy.

